

ENKAGRID® MAX 30 – BIAXIAL GEOGRIDS FOR SUB-BASE STABILIZATION

MECHANISMS OF GEOGRID SUB-BASE STABILIZATION AND THE RELEVANCE OF GRID SHAPES

Stabilization: The improvement of the mechanical properties of an unbound granular material by including one or more geosynthetic layers to reduce the deformation under load by minimizing soil particle movement.

Stabilization by geogrids involves the minimization of particle movement through the confinement / interlocking effect. This is achieved by particle restraint and, if the geogrid is placed on a subgrade which is not filter-stable opposite the sub-base, consideration should be given to the requirement of separation and filtration. In order for a geogrid to minimize particle movement, it must have adequate in-plane stiffness and good interaction with the sub-base material. Here, the aperture size relative to the aggregate particle size and grading are key characteristics.

Radial secant stiffness

The in-plane stiffness (at low elongations) of a geogrid is one of the most significant indicators of its performance, according to different research studies. Stiffness, or initial modulus, in kN/m describes the tensile behavior of the product at low strain values, and can be determined according to EN ISO 10319, or according to a modified EN ISO 10319 test created for hexagonal geogrids (ETA 12/0530).

Tests on EnkaGrid MAX 30 were carried out in 2017 at the independent laboratory of Kiwa GmbH. Figure 1 shows the radial secant stiffness (at 0.5% strain) values of EnkaGrid MAX 30 and compares these to radial secant stiffness values (at 0.5% strain) of the typical hexagonal geogrid range.

It is a misconception that good stabilization is only achieved by hexagonal geogrids: the initial modulus and the interlocking properties of stiff biaxial geogrids like EnkaGrid MAX are more than adequate to ensure excellent sub-base stabilization in road structures.

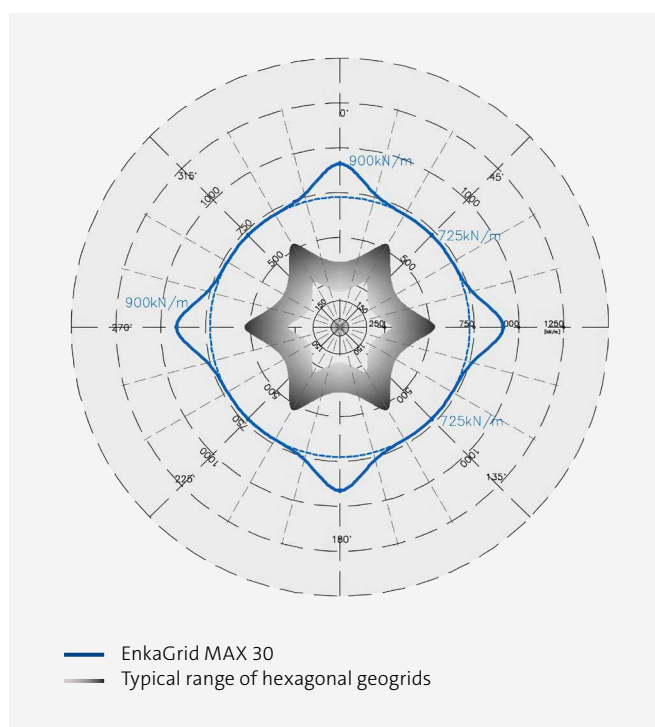


Figure 1

Radial secant stiffness at 0.5% elongation.

The radial stiffness values of EnkaGrid MAX 30 were taken from the Test Report No. 1.1/10360/0819.0.1-2017e.

EnkaGrid MAX 30 values

Min. radial stiffness at 0.5% strain: 725 kN/m

Min. radial stiffness at 2.0% strain: 500 kN/m

Isotropy stiffness coefficient: 0.8 (-0.15 tolerance)

China	+86 519 6858 5555	Germany	+49 6022 812020	The Netherlands	+31 85 744 1300
France	+33 1 74 90 00 13	Hungary	+36 23 610 870	U.S.A.	+1 828 665 5000

Disclaimer: All information contained in this document corresponds to our current knowledge and assumptions and is granted without guarantee or representation of being exhaustive or correct. It is only an indication for your own internal evaluation, and shall not substitute for any assessment you may need to conduct to determine the suitability of the product for your particular purposes. Freudenberg assumes no liability or responsibility for the completeness or accuracy of the information contained herein. These are regularly reviewed. The product brands marked ® are registered trademarks of companies that are part of the Freudenberg Group in several countries and regions. © Freudenberg 2021